




Lagoon Agi-Pompe and Super Pump

These heavy-duty pumps will rapidly homogenize liquid manure in lagoons. Our lagoon pumps will provide you with excellent stability to work safely.

Lagoon Agi-Pompe

Hog Slurry & Dairy Manure	Maximum transfer consistency 3/4" (19 mm)	
	Maximum agitation consistency 1 1/2" (38 mm)	
 Straw	 Sawdust	 Sand*


To homogenize liquid manure using a tractor with a minimum of 80 HP. 540 RPM only.

Available in 1000 RPM for tractors with a minimum of 160 HP.

* With optional abrasive resistant steel housing and bottom plate.


Agi-Pompe Housing and Impeller


20" (508 mm) or 26" (660 mm) impeller.

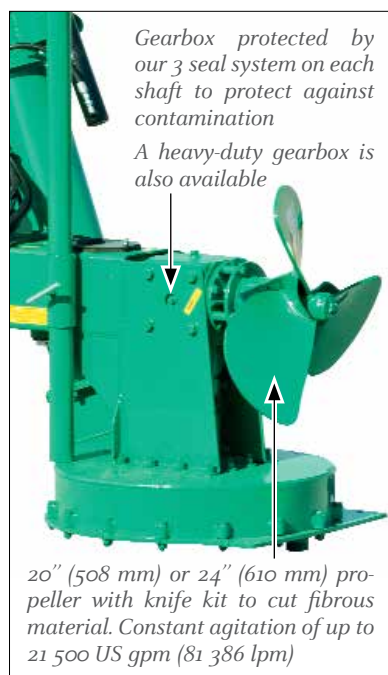

Draw Bar and Hitch

Length and angle are adjustable to avoid PTO vibration.

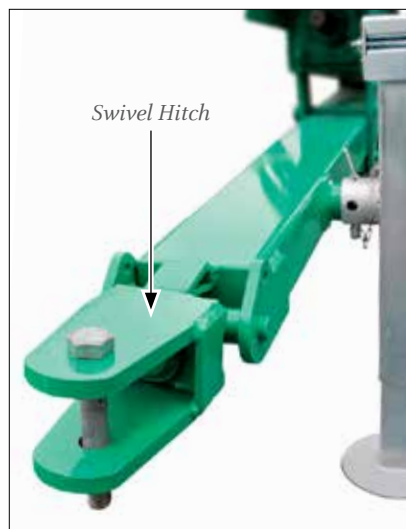

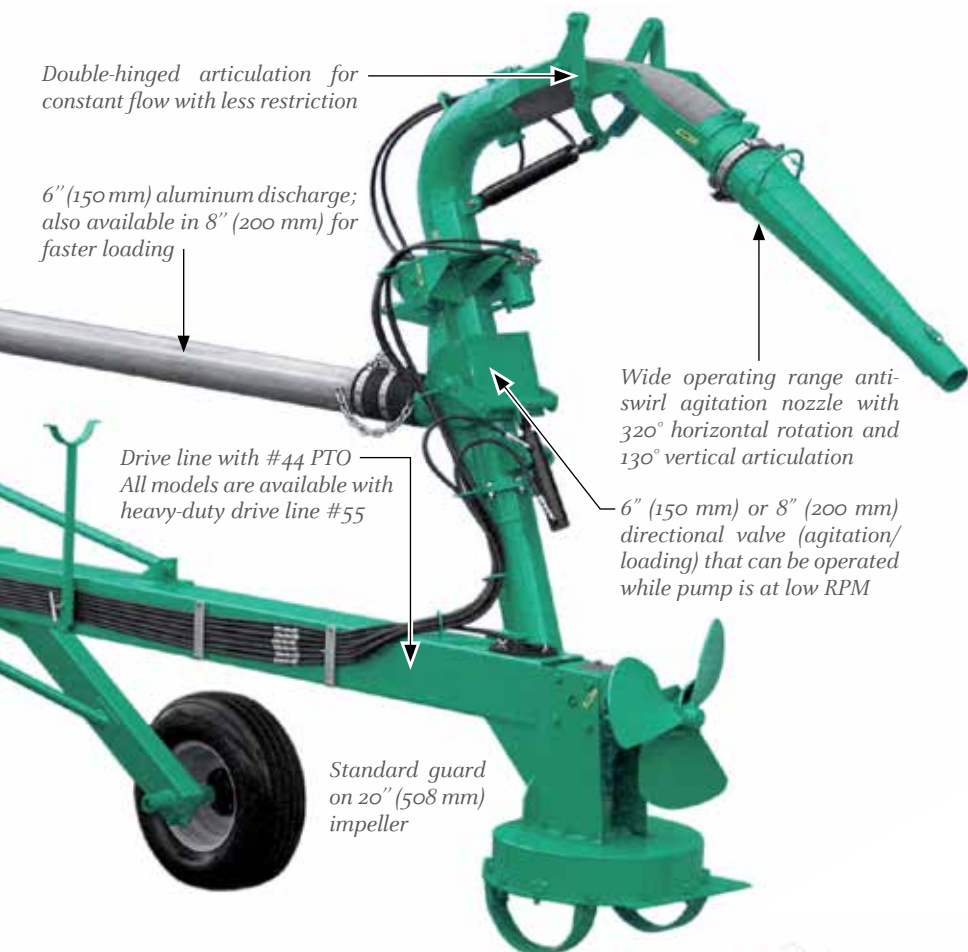

Double-hinged articulation for constant flow with less restriction

6" (150 mm) aluminum discharge; also available in 8" (200 mm) for faster loading

Drive line with #44 PTO
All models are available with heavy-duty drive line #55

Wide operating range anti-swirl agitation nozzle with 320° horizontal rotation and 130° vertical articulation

6" (150 mm) or 8" (200 mm) directional valve (agitation/loading) that can be operated while pump is at low RPM

Standard guard on 20" (508 mm) impeller



Pump reinforcement truss

Lagoon Super Pump

Hog Slurry & Dairy Manure	Maximum transfer consistency 3/4" (19 mm)	
	Maximum agitation consistency 2 1/4" (57 mm)	
	✓ Straw	✓ Sawdust
		✓ Sand*

To handle slurry using a tractor with a minimum of 80 HP. 540 RPM.


Available in 1000 RPM for tractors with a minimum of 180 HP.

* With optional abrasive resistant steel housing and bottom plate.

The information above applies to the 28" (711 mm) impeller.

Super Pump Housing and Impeller

26" (660 mm) or 28" (711 mm) impeller with 540 RPM or 23" (584 mm) impeller with 1000 RPM.

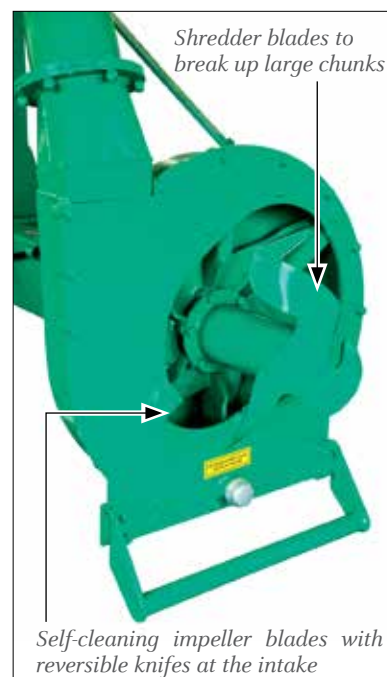

Shredder blades to break up large chunks

Self-cleaning impeller blades with reversible knives at the intake