



12" VERTICAL PIT PUMP

Load in record times with the new 12,000 GPM Pump



PUMPS 12,000 GPM

Loads faster & provides better agitation than the competition



TRIPLE PORT OUTLET

Pumps more while using half the fuel



UNIQUE AGITATOR

8"-6" Discharge for unbeatable volume and pressure



LOW MAINTENANCE

Tungsten Carbide Mechanical Seal for ultimate protection



FULLY CUSTOMIZABLE

2 PT, 3 PT & trailer models available, optional multi depth and dual agitators



RADIO CONTROL

Optional wireless control of valve to switch from "agitate" to "fill"



WHITE IRON HOUSING

Header Series White Iron Housing stands up to sand and harsh environments




KEEP IT COOL

Electric gear box cooler, to keep cool in the toughest applications



12" VERTICAL PIT PUMP

Load in record times with the new 12,000 GPM Pump

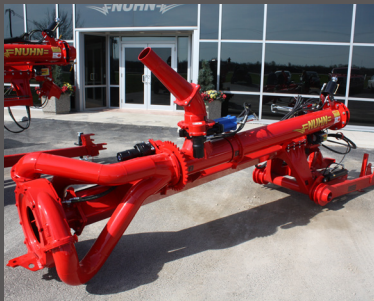

2 PT CONFIGURATION



3PT CONFIGURATION



OPTIONAL DUAL PTO



PUMP TRAILER

TECHNICAL SPECIFICATIONS

12,000 GPM @ 980 RPM 285 HP
9,500 GPM @ 780 RPM 150 HP

MAXIMUM HP REQUIRED	285 HP
PIPE SIZE	12" ID
AGITATOR ROTATION	170 °
AGITATOR HEIGHT	80 °
AGITATOR OUTLET DIAMETER	6"
OVERALL HOUSING WIDTH	32"
DRIVE SHAFT DIAMETER	4" OD
DRIVE SHAFT YOKE SIZE	55/80 SERIES
SEALING SYSTEM	MECHANICAL
LUBRICATION STYLE	OIL BATH
HYDRAULIC CONTROL	STANDARD
MAIN FRAME	8" X 8" X 1/4"
WEAR MATERIALS	WHITE IRON
IMPELLER DIAMETER	20.5"
IMPELLER STYLE	4 BLADE
WIRELESS CONTROL	OPTIONAL